
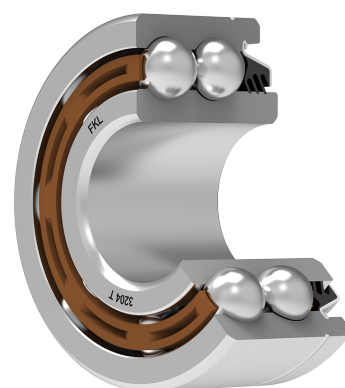


Double Row Angular Contact Ball Bearing

3204 T

Double Row Angular Contact Ball Bearing
Seeding Machine

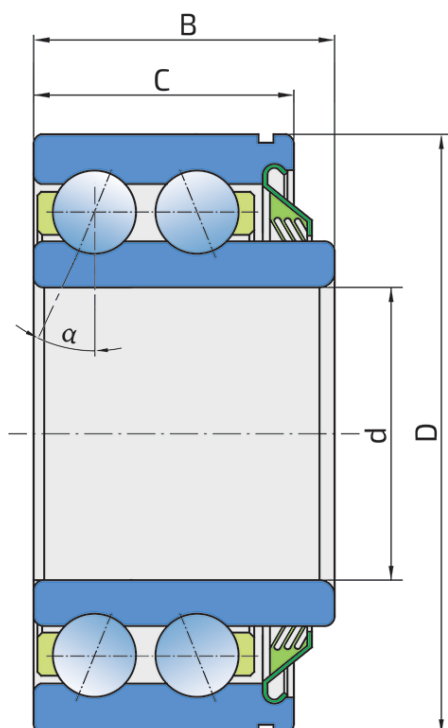

Technical Specification

| | | |
|------------------|--------------------------------|----------|
| C _{dyn} | Dynamic load rating | 18.8 kN |
| C _o | Static load rating | 12.6 kN |
| D | Outside diameter | 47 mm |
| d | Bore diameter | 20 mm |
| C | D-shape hole cut out dimension | 22 mm |
| kg | Mass | 0.185 kg |
| B | Width inner ring | 25.2 mm |
| α | Contact angle | 25 ° |

Sealing

T SEAL ON ONE SIDE (T)

3-lip seal on the front side which is exposed to contaminants, while the base side is open to the lubricant.

