
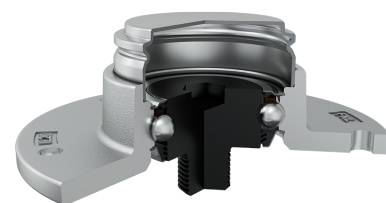


# The Bearing Solution For Seeding Machines, Integrated Flange

## IL20-92/5H-M16-L

The Bearing Solution For Seeding Machines, Integrated Flange  
Seeding Machine

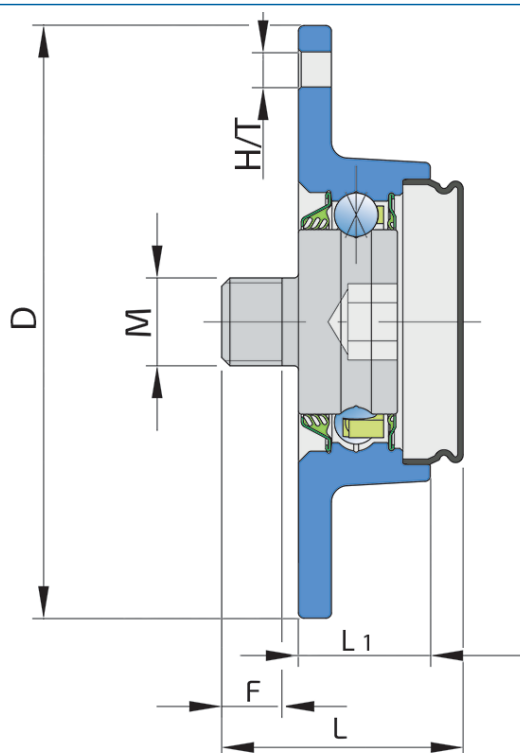

### Technical Specification

|      |                         |                 |
|------|-------------------------|-----------------|
| J    | Pitch circle diameter   | 92 mm           |
| D    | Outside diameter        | 108 mm          |
| H/T  | Hole/Thread             | 5x6.4 mm        |
| M    | Outer Thread            | M16x1.5-left mm |
| L    | Total length            | 51.7 mm         |
| L1   | Total flange length     | 24 mm           |
| F    | Length of threaded part | 14 mm           |
| kg   | Mass                    | 0.67 kg         |
| Cdyn | Dynamic load rating     | 22 kN           |
| Co   | Static load rating      | 15.2 kN         |
| Pu   | Fatigue load limit      | 0.64 kN         |

## Sealing

### T SEAL / S SEAL+METAL PROTECTIVE CAP

3-lip seal on the base side and the S seal with Metal protective cap on the front side.

3-lip seal on the base side also protected with attached disc, protecting the bearing from contamination.

S seal with a Metal protective cap on the front side eliminates bearing contaminants.

