
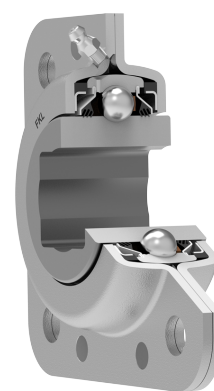
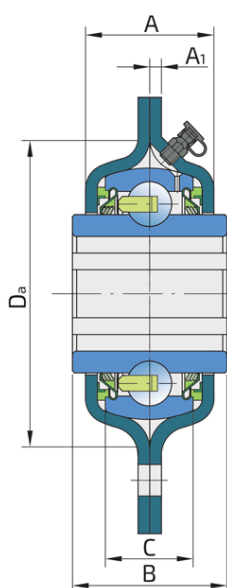


## Square Series

### GWST 209PPB31

Square Series

Disc Harrow

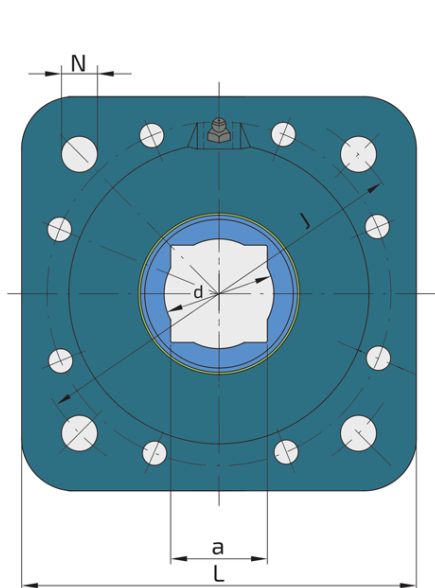

#### Technical Specification

a	Hexagonal bore	30 mm
d	Bore diameter	5.765 inch
d	Bore diameter	48.831 mm
B	Width inner ring	42.85 mm
C	Width outer ring	22 mm
a	Shaft size	30 inch
Da	Centering diameter	97 mm
L	Overall length	127 mm
A	Distance from the housing flange to the front of the inner ring of the bearing	39 mm
A1	Width of the top of the housing	3.5 mm
J	Pitch circle diameter	127 mm
N	Diameter of attachment slot	13.5 mm
Fr	Radial load	7.7 kN
Fa	Axial load	3.8 kN
kg	Mass	1.69 kg
Cdyn	Dynamic load rating	32.5 kN
Co	Static load rating	20.4 kN
Pu	Fatigue load limit	0.857 kN

## Sealing

### RUBBER PLUG + T SEAL / T SEAL + RUBBER PLUG

3-lip seal seal on both sides provide long lasting protection of the bearing against the penetration of contaminants. Rubber plugs are protecting the area between the bearing and sheet metal housing.

