


# Armor Bearing Unit

## LEFG 209 TDT

Armor Bearing Unit

Universal Solution

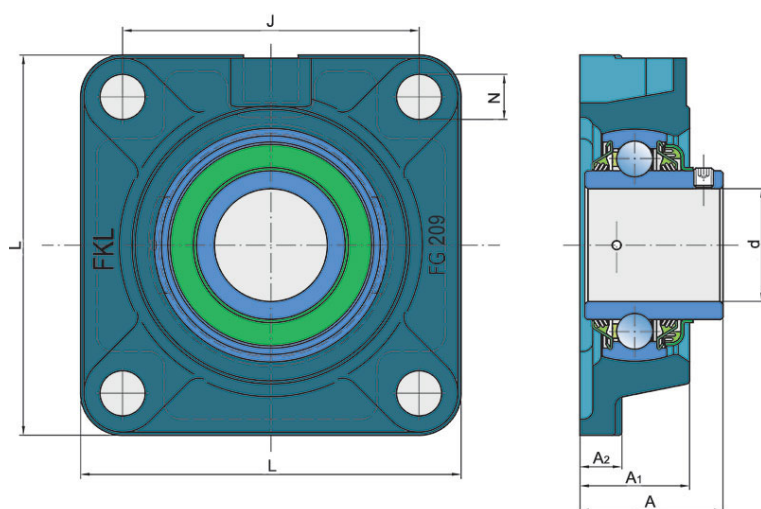

### Technical Specification

|      |                            |         |
|------|----------------------------|---------|
| d    | Bore diameter              | 45 mm   |
| A1   | Total housing width        | 38 mm   |
| A2   | Housing flange thickness   | 16 mm   |
| J    | Distance between the holes | 105 mm  |
| L    | Total length               | 137 mm  |
| N    | Hole diameter              | 16 mm   |
| A    | Overall width              | 52.2 mm |
| kg   | Mass                       | 2.41 kg |
| Cdyn | Dynamic load rating        | 33.2 kN |
| Co   | Static load rating         | 21.9 kN |
| Pu   | Fatigue load limit         | 0.92 kN |

## Sealing

---

### DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants.

The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

&nbsp;

