
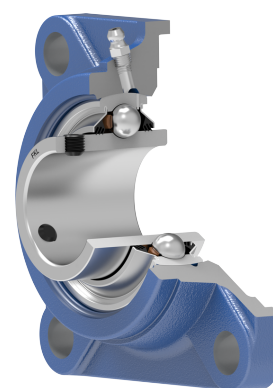


Bearing Unit

LEFN 209 2T

Bearing Unit

Universal Solution

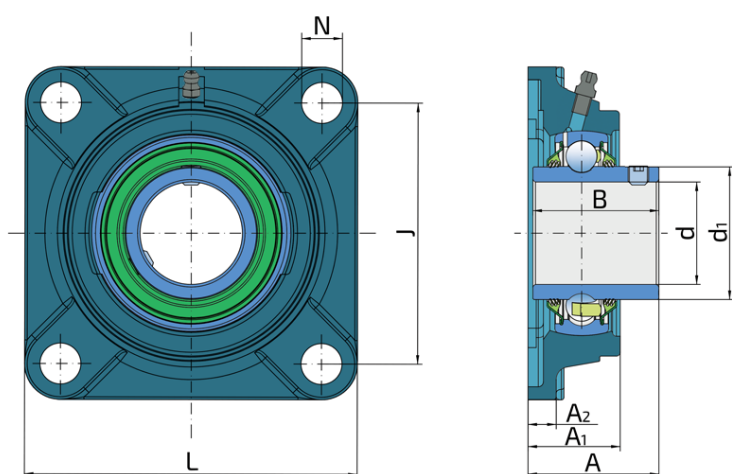

Technical Specification

| | | |
|------|----------------------------|----------|
| d | Bore diameter | 45 mm |
| d1 | Outer diameter inner ring | 56.6 mm |
| L | Total length | 137 mm |
| J | Distance between the holes | 105 mm |
| N | Hole diameter | 16 mm |
| A | Overall width | 52.2 mm |
| A1 | Total housing width | 38 mm |
| A2 | Housing flange thickness | 12 mm |
| B | Width inner ring | 49.2 mm |
| kg | Mass | 2.25 kg |
| Cdyn | Dynamic load rating | 32.5 kN |
| Co | Static load rating | 20.4 kN |
| Pu | Fatigue load limit | 0.857 kN |

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

