


Ball Bearing

Q 203PP.AH02*M

Ball Bearing

Seeding Machine; Sprocket

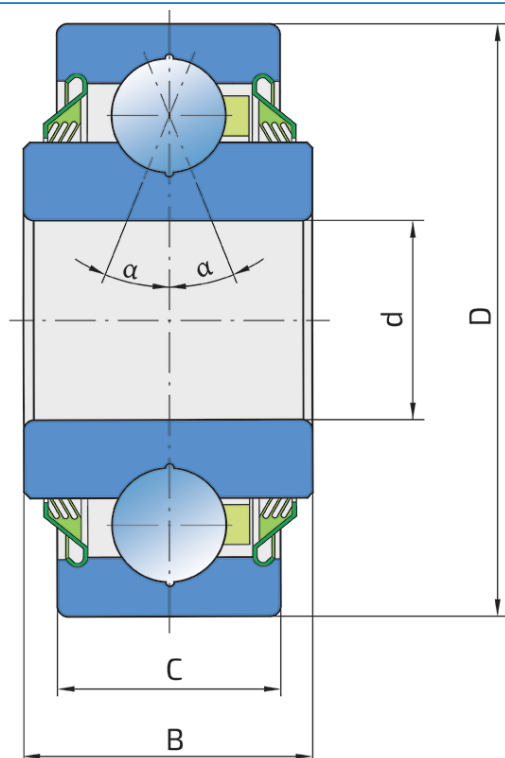

Technical Specification

d	Bore diameter	16.2 mm
D	Outside diameter	40 mm
B	Width inner ring	18.29 mm
C	Width outer ring	12 mm
α	Contact angle	25 °
kg	Mass	0.08 kg
C _{dyn}	Dynamic load rating	15.6 kN
C _o	Static load rating	10 kN
P _u	Fatigue load limit	0.42 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

