
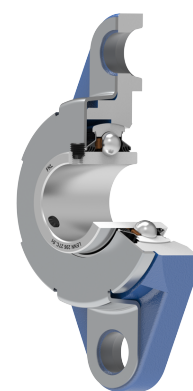


Bearing Unit

LENN 206 2TC.S1

Bearing Unit

Universal Solution

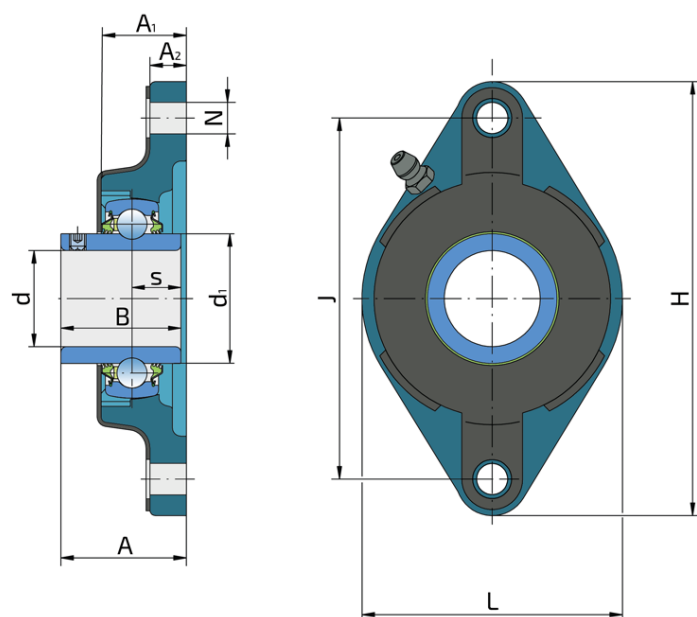

Technical Specification

d	Bore diameter	30 mm
d1	Outer diameter inner ring	39.7 mm
H	Housing height	148 mm
L	Total length	80 mm
J	Distance between the holes	117 mm
B	Width inner ring	38.1 mm
s	Distance from inner ring side face to raceway centre	15.9 mm
N	Hole diameter	16 mm
A	Overall width	40.2 mm
A1	Total housing width	30.5 mm
A2	Housing flange thickness	13.5 mm
kg	Mass	1.12 kg
Cdyn	Dynamic load rating	19.5 kN
Co	Static load rating	11.3 kN
Pu	Fatigue load limit	0.475 kN

Sealing

T SEAL / T SEAL+METAL COVER

3-lip seal on the base side and 3-lip seal with Metal cover on the front side which is exposed to contaminants.

The 3-lip seal on the front side protects the bearing from contaminant penetration.

The Metal cover protects the seal from mechanical damage and from entanglement of grass stems of plants and twines.

