
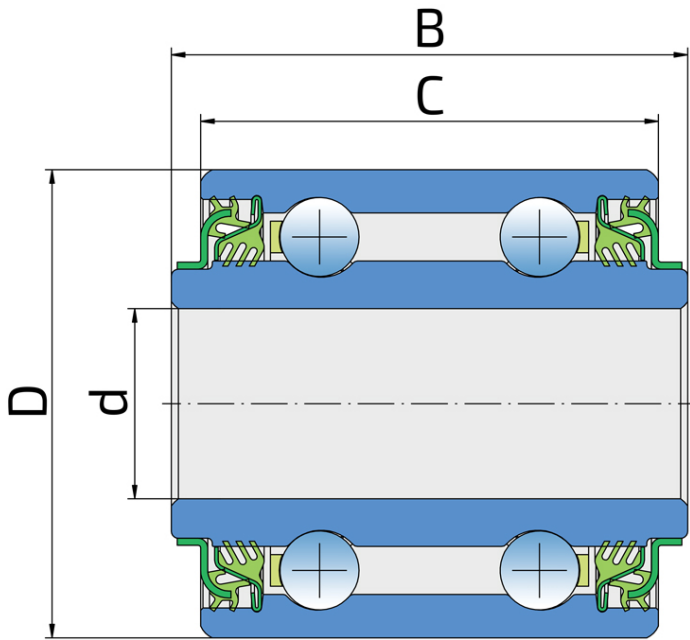


Ball Bearing

SL 5203.B-2TQ

Ball Bearing

Seeding Machine



Technical Specification

D	Outside diameter	40 mm
d	Bore diameter	16.256 mm
B	Width inner ring	44.12 mm
C	Width outer ring	39.12 mm
kg	Mass	0.218 kg
Cdyn	Dynamic load rating	14.21 kN
Co	Static load rating	8.8 kN
Pu	Fatigue load limit	0.37 kN

Sealing

TQ SEAL / TQ SEAL (2TQ)

The 2TQ bearing seal (7-lip seal on both sides) is a high-performance contact sealing solution designed to protect bearings from contamination while retaining lubricant inside the bearing. Its design features seven sealing lips on each side, creating a multi-stage barrier against dust, moisture, dirt, and other external contaminants. This advanced sealing system significantly enhances bearing reliability and performance in demanding operating conditions.

